

SMALL EXCAVATOR RANGE

SY50U



- » Extra reinforcement of major structural members and large multi-stage air and fuel filtration make the machine more stable and reliable
- » The tier 4 final power plant, advanced SLSS hydraulic system, optimal power control and work mode selection improve speed and power while reducing fuel consumption
- » Zero tail swing radius and independent boom swing allow operation in extremely confined spaces. This allows operation in locations that were previously inaccessible.
- » Easily accessible service points and a detachable radiator screen are among the features that make scheduled maintenance more convenient

SY50U-TIER 4F

OPERATING WEIGHT:

5200kg

MENGINE MODEL:

Yanmar 4TNV88C -PSY

warranty:
Year / 5,000 Hour

YELLO EQUIPMENT

SANY AUTHORISED DEALER

P: 1300 093 556 W: YELLOEQUIPMENT.COM





SY50U DIMENSIONS & SPECIFICATIONS


	OVERALL DIMENSIONS	
Α	Transport Length	5390 mm
В	Transport Width	1960 mm
C	Transport Height	2630 mm
D	Upper Frame Width	1760 mm
Ε	Cab Height	340 mm
F	Standard Track Width	400 mm
G	Track Gauge	1560 mm
Н	Min Ground Clearance	325mm
I	Tail Swing Radius	980 mm
J	Track G round Length	1990 mm
K	Track Length	2510 mm

	WORKING RANGE	
a	Maximum Digging Height	5450 mm
b	Maximum Dumping Height	3805 mm
С	Maximum Digging Depth	3420 mm
d	Maximum Vertical Wall Digging Depth	2460 mm
е	Maximum Digging Reach	5880 mm
f	Minimum Swing Radius	2520 mm
g	Maximum Height at Minimum Swing Radius	4155 mm

MACHINE PARAMETERS			
O perating Weight	11,905 lb - 5,400 Kg		
Engine Type	Yanmar		
Engine Max Power (Gross)	39 hp/ 29.1 kW @ 2400 rpm10.3KW/ 2200rpm		
Engine Max Torque	133.3 ft-lbs/ 144.9 N m @ 1500 rpm		
Engine Displacement	133.8 in3 - 2.191		
Main Pump Flow	29 gal/ 110 lpm		
Swing Speed	10 rpm		
Travel Speed	2.5/ 1.5 mph 4.1/ 2.4 kph		
Tractive Effort	9,150 lbf - 40.7 kN		
Max Arm Digging Force (SAE)	5,150 lbf - 22.9 kN		
N umber of Upper Rollers	2		
Number of Lower Rollers	4		
Fuel Tank Capacity	20.6 gal - 78 L		
Hydraulic Tank Capacity	13.7 gal - 52 L		
Cooling System Capacity	1.1 gal - 4.2 L		
Engine Oil Capacity	2.0 gal - 7.4 L		
G round Pressure	4.5 psi - 31.6 kPa		

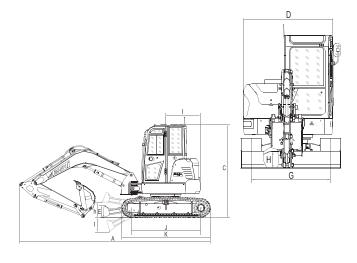



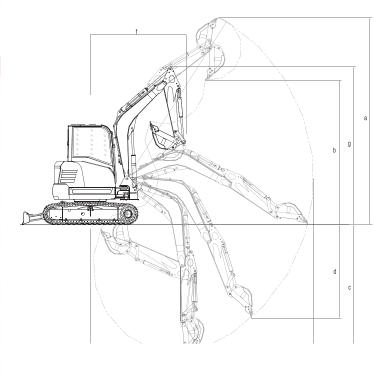

Not all products are available in all markets. Under our policy of continuous improvement, Sany reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

