

YELLOWTM
EQUIPMENT



SCAN
QR CODE FOR
PRODUCT INFO

PRODUCTIVITY DELIVERED TODAY

QUICK. PRECISE. POWERFUL.

CONSTRUCTION MACHINERY




LARGE EXCAVATOR **365H**

SANY


Quality Changes the World

Engine
ISUZU GH-6HK1XKSC
Rated Power
212kW / 2000 Rpm
Bucket Capacity
1.5m³
Operating Weight
36000 kg

SY365H DIMENSION & SPECIFICATIONS

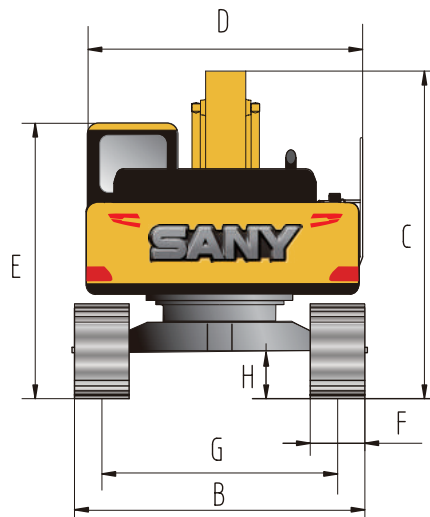

ITEM	mm
A Transport Length	11530
B Transport Width	3190
C Transport Height	3545
D Upper Structure Width	3150
E Cab Height	3320
F Standard Track Shoe Width	600
G Track Gauge	2590
H Min Ground Clearance	550
I Tail Swing Radius	3560
J Center distance of tumbler	4140
K Track Length	5065

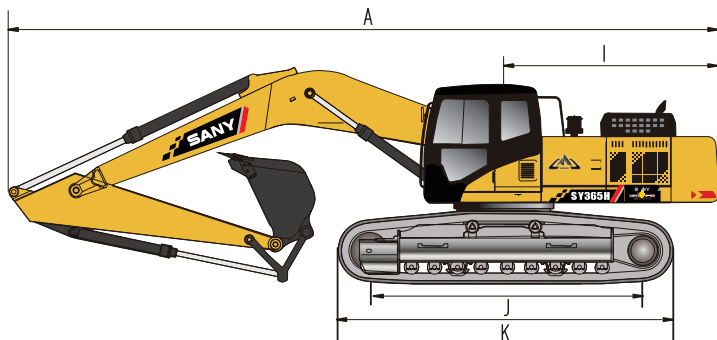


UNDERCARRIAGE	
Track shoe width (mm)	600
Track roller (per side)	9
Carrier roller (per side)	2

WORKING RANGE

ITEM	mm
A Max. Digging Height	9890
B Max. Dumping Height	6920
C Max. Digging Depth	7050
D Max. Vertical Digging depth	3970
E Max. Digging Reach	10780
F Min. Swing Radius	4495
G Height at Min. Swing Radius	8600

MACHINE PARAMETERS	
Operating Weight	36000 kg
Engine Type	ISU ZU GH -6H K1 X KSC
Engine Max Power (Gross)	212 kW @2000rpm
Engine Max Torque	1080 Nm @1500rpm
Engine Displacement	7.79 Litre
Swing Speed	9.5 rpm
Travel Speed	5.5 /3.5 km/h
Bucket Digging Force	235 kN
Fuel Tank Capacity	690 Litre
Engine Oil Capacity	36 Litre
Ground Pressure	65k Pa

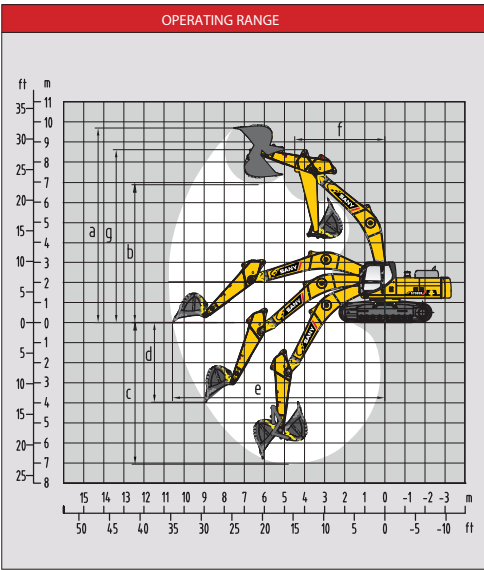

Not all products are available in all markets. Under our policy of continuous improvement, Sany reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.

YELLO EQUIPMENT

SANY AUTHORISED DEALER

P: 1300 093 556 W: YELLOEQUIPMENT.COM

YELLO™
EQUIPMENT