

SY215C 22T excavator features customized engine, strengthened components, high operating efficiency, low fuel consumption, easy maintenance and comfort cabin.

- » Innovative controller with faster consumption and more accuracy reduces the response time of hydraulic elements, lowers the internal power loss of the system and increases the operating output power.
- » The positive flow controlled by hydraulic system considerably reduces fuel consumption. Advanced computer dynamic control technology provides a real-time match between engine power and main pump power. Four power modes maximize fuel economy.

SY215C

A OPERATING WEIGHT:

21900kg

MENGINE MODEL:

Mitsubishi 4M50

WARRANTY:

4 Year / 8,000 Hour

YELLO EQUIPMENT





SY215C DIMENSIONS & SPECIFICATIONS


| OVERALL DIMENSIONS | | | | |
|--------------------|-----------------------|---------|--|--|
| Α | Transport Length | 9680 mm | | |
| В | Transport Width | 2980 mm | | |
| С | Transport Height | 3440 mm | | |
| D | Upper Width | 2875 mm | | |
| F | Cab Height | 3075 mm | | |
| G | Tail Swing Radius | 2900 mm | | |
| Н | Min. Ground Clearance | 440 mm | | |
| WORKING DANGE | | | | |

| WORKING RANGE | | | | |
|---------------|-----------------------------------|----------|--|--|
| а | Maximum Digging Height | 9600 mm | | |
| b | Maximum Dumping Height | 6730 mm | | |
| С | Maximum Digging Depth | 6600 mm | | |
| d | Maximum Vertical Digging Depth | 6255 mm | | |
| е | Maximum Digging Reach | 10280 mm | | |
| f | Maximum Swing Radius | 3730 mm | | |
| g | Height at Min. Swing Radius | 7680 mm | | |

| MACHINE PARAMETERS | | | |
|--------------------------|---------------------|--|--|
| Operating Weight | 21900 kg | | |
| Engine Type | Mitsubishi 4M50 | | |
| Engine Max Power (Gross) | 118kw/2000rpm | | |
| Engine Max Torque | 590/1400 Nm/rpm | | |
| Engine Displacement | 5.86L | | |
| Emission Standard | Tier 3 | | |
| Swing Speed | 11rpm | | |
| Travel Speed | 5.4/3.3km/h | | |
| Fuel Tank Capacity | 340 L | | |
| Hydraulic Tank Capacity | 239 L | | |
| Engine Oil Capacity | 22 L 47.4kPa | | |
| Ground Pressure | 70%/35° | | |
| Gradeability | | | |
| Bucket Digging Force | 138kN | | |
| Arm Digging Force | 103kN | | |
| Tractive Force | 248kN | | |
| Bucket Capacity | $0.93 \mathrm{m}^3$ | | |
| Boom Length | 5.7m | | |
| Arm Length | 2.9m | | |
| Track Gauge | 2380mm | | |
| Track Length | 4250mm | | |





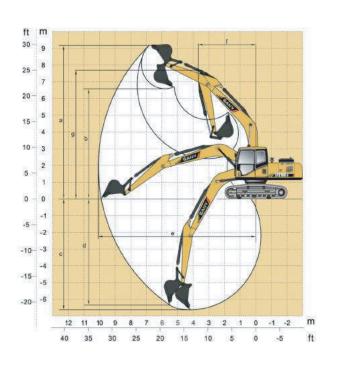

Not all products are available in all markets. Under our policy of continuous improvement, Sany reserve the right to change specifications and design without prior notice. The illustrations do not necessarily show the standard version of the machine.



